

# Compensator

SAE 1" to 5"


Rubber compensators are elastic connectors with turnable SAE flanges. Compensators are used for damping oscillations, vibrations, noises and movements in axial and transversal direction.

## Design

Rubber compensators have a plain surface vulcanized to a fabric body (inside and outside) of the rubber part. The outside is weather resistant and protects the fabric against ageing, wear and corrosion. The interior of the rubber part consists of nitril-butadien-caoutchouc (NBR). Because compensators have tightening lips on both sides, further seals are not necessary.

## Use

For all mineral oil products, crude oil, lubrication oil, cooling oil (-20°C up to 80°C, intermittent 100°C), grease, cold water, warm water up to 60°C, water/oil emulsions, fuel with 30% aromatic content. For operation in suction and return lines.

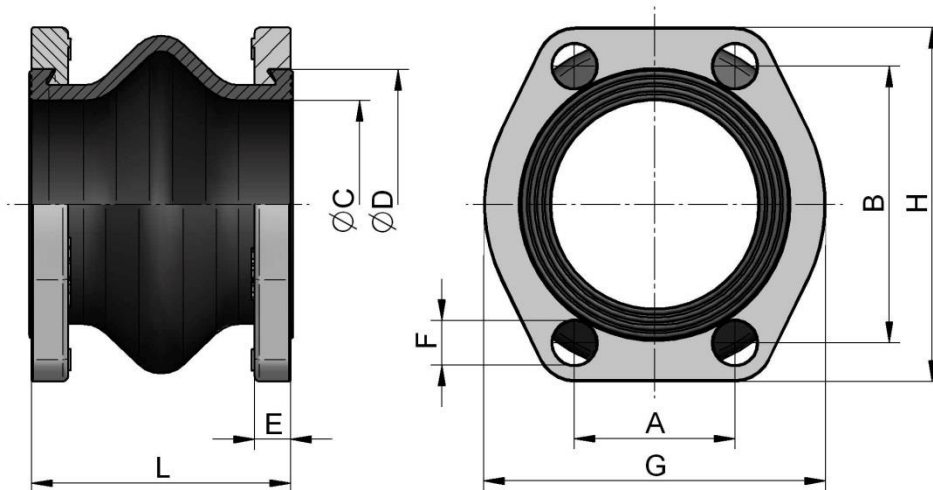

order number	description	size		A	B	D	C	E	F	G	H	L	weight
		SAE	NG*	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
SDKSS025	K16S – 25	1"	25	26,2	52,4	43	25 <sup>+1</sup> <sub>-2</sub>	11	11	59	70	65	0,4
SDKSS032	K16S – 32	1 ¼"	32	30,2	58,7	50	32 <sup>+1</sup> <sub>-2</sub>	11	13	73	81	65	0,5
SDKSS040	K16S – 40	1 ½"	40	35,7	70,0	62	40 <sup>+1</sup> <sub>-3</sub>	13	13	83	95	100	0,8
SDKSS050	K16S – 50	2"	50	42,9	77,8	72	48 <sup>+1</sup> <sub>-3</sub>	13	13	97	103	100	1,0
SDKSS063	K16S – 63	2 ½"	63	50,8	89,0	87	63 <sup>+1</sup> <sub>-3</sub>	14	13	109	115	100	1,2
SDKSS080	K16S – 80	3"	80	62,0	106,4	104	80 <sup>+1</sup> <sub>-3</sub>	14	17	131	136	100	1,8
SDKSS090	K16S – 90	3 ½"	90	70,0	120,6	104	80 <sup>+1</sup> <sub>-3</sub>	14	17	140	152	100	1,9
SDKSS100	K16S – 100	4"	100	77,8	130,2	130	100 <sup>+1</sup> <sub>-3</sub>	16	17	152	162	100	2,5
SDKSS126	K16S – 125	5"	125	92,0	152,4	155	125 <sup>+1</sup> <sub>-3</sub>	16	17	165	184	130	3,0


\*... NG = nominal size

## Material

inside	NBR/CR
outside	CR
flange	steel

## Working Pressure

maximum working pressure	0,2 to 1,5 bar absolute
--------------------------	-------------------------



Please read manual before installation and for the maximum movement tolerances of the rubber connection! Note, that the dimension tolerances have to be taken from the corresponding scale drawing.

This data sheet shows a technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. The information in this data sheet is intended to be used as a first general guideline only. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. The cooling performance and the general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Due to different conditions in testing and application environments the cooling performance may also vary by +/- 15%. Therefore we recommend all coolers to be checked under the system operating conditions. This is also true of vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors.